

Amendments to the Claims

This listing of claims will replace all prior versions, and listings of claims in the application:

Listing of Claims:

In The Claims:

Claim 1-14 (Cancelled)

15. (Currently amended) A thermoplastic molding composition comprising
- a) 60-65 parts by weight of a poly(ester) carbonate,
 - b) [3-20] 13 – 20 parts by weight of a rubber modified graft polymer having a graft base and
 - c) 5-20 parts by weight of a member selected from the group consisting of polyethylene naphthalate and polyethylene naphthalate co-terephthalate said rubber modified graft polymer including rubber B.2 grafted with at least one random (co)polymer of B.1.1 and/or B.1.2, wherein B.2 is at least one rubber selected from the group consisting of diene, EP(D)M, polyurethane, silicone, chloroprene and ethylene/vinyl acetate and wherein B.1.1 is at least one member selected from the group consisting of styrene, α -methylstyrene, halo-ring substituted styrene and alkyl-ring-substituted styrene and (meth)acrylic acid C₁-C₈ alkyl ester and wherein B.1.2 is at least one member selected from the group consisting of unsaturated nitrile and (meth)acrylic acid C₁-C₈ alkyl ester.

16. (Currently amended) The composition of Claim 15 wherein the graft polymer has average particle diameter (d_{50}) as determined by counting on electron micrographs of 0.5 to 5 μm .

17. (Previously presented) The composition of Claim 16 wherein the average particle diameter is 0.5 to 2.5 μm .


18. (Previously presented) The composition of Claim 16 wherein the average particle diameter is 0.1 to 0.5 μm .

19. (Previously presented) The composition of Claim 15 further containing at least one member selected from the group consisting of vinyl copolymer and polyalkylene terephthalate.

20. (Previously presented) The composition of Claim 15 wherein the graft base is at least one rubber selected from the group consisting of diene, EP(D)M, acrylate, polyurethane, silicone, chloroprene and ethylene/vinyl acetate.

21. (Previously presented) The composition of Claim 15 further containing at least one member selected from the group consisting of flame retardant, stabilizer, pigment, mold release agent, flow auxiliary and antistatic agent.

22. (Previously presented) The composition of Claim 21 wherein the flame retardant is a phosphates conforming to formula (IV)

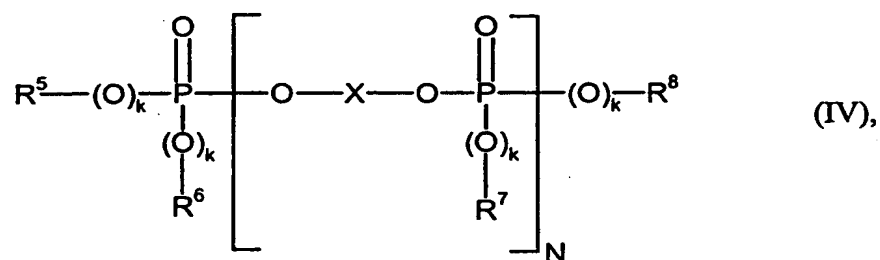

in which

R^5 , R^6 , R^7 and R^8 independently of one another denote a member selected from the group consisting of C_1 - C_8 alkyl, C_5 - C_6 cycloalkyl, C_6 - C_{30} aryl and C_7 - C_{12} aralkyl,

X denotes a mono- or polycyclic aromatic radical having 6 to 30 C atoms,

k independently of one another is 0 or 1 and

N is 0 to 30.

23. (Previously presented) The composition of Claim 22 wherein the C₁-C₈ alkyl is halogenated.

24. (Currently amended) The composition of Claim 22 wherein at least one member selected from the group consisting of C₅-C₆ cycloalkyl, C₆-C₃₀ aryl or C₇-C₁₂ aralkyl is [alkyl and/or halogen-substituted] substituted by at least one member selected from a second group consisting of halogen and alkyl.

25. (Previously presented) A method of using the composition of Claim 15 comprising forming a molded article.

26. (Previously presented) A molded article comprising the composition of Claim 15.